



**CUSTOM
WINDOWS**
ALUMINIUM WINDOWS & DOORS



Designed to maximise natural airflow with minimal obstruction.

Gas Strut Served Window


The Gas Strut Served window offers a versatile Served window that is easy to fabricate and install. It has been designed to maximize natural airflow with minimal obstruction by creating a wide opening. Suitable with sill and no sill applications while incorporating twin bolts/flush bolts for easy locking.






Typical Configurations

With Sill

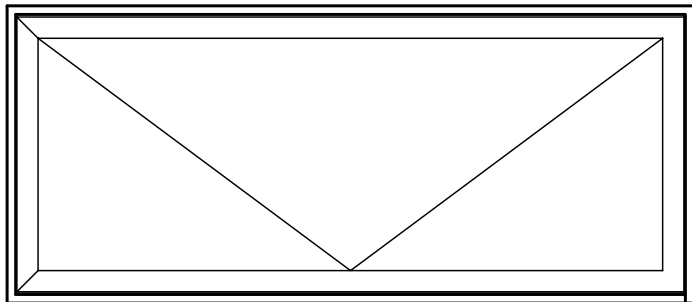

No Sill

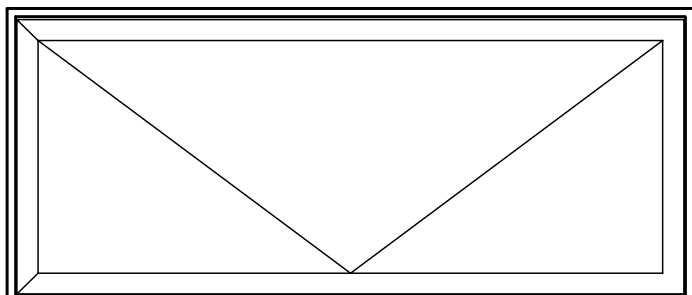

CAD Cross Sections



Key Features

- Perfect kitchen servery window providing a full 90 degree opening.
- Available with a sill or no sill.
- Effortless smooth opening by high performance gas struts and hinges.
- Self-latching locking system without the need for holes in the frame or cut into your bench.
- Maximises natural airflow

Technical Specifications

Frame Dimensions

101.6 x 44.5mm

Maximum Product Performance

Class Thickness	SLS (Pa)	ULS (Pa)
6mm	764	3306
12mm	959	3101

Maximum Recommended Sizes

Height 1500mm
Width 2000mm

Glazing Details

Single Glazed 6 -13.5mm
Double Glazed 18-28mm

Compatible Systems

McArthur Evo



Showrooms

67 McDonald Cres, Bassendean WA 6054
Display 62, Homebase Subiaco,
55 Salvado Rd, Subiaco WA 6008

(08) **9279 7444**

sales@customwindows.com.au

customwindows.com.au

