



**CUSTOM
WINDOWS**
ALUMINIUM WINDOWS & DOORS



Hawkesbury®
Commercial Multi-Fold Door

Smooth, trouble free operation, while keeping the harsh elements out.

Multi-Fold Door Range

Designed with large floor to ceiling applications in mind, the Hawkesbury® Multi-Fold Door Range combine full sized commercial perimeter framing with specially designed commercial door stiles. A functional alternative to traditional door units in lighter commercial and residential applications the Hawkesbury® removes the barriers to allow flow between indoor and outdoor living. Whether the doors are open in fine weather or securely fastened into place as sturdy impenetrable walls, the Hawkesbury® Door is the only choice.







High Performance Hardware

Powered by exclusive hardware from Centor Architectural the Hawkesbury® Door features top-rolling operation for smooth, trouble-free operation whether configured for inward or outward stacking or with an odd or even number of door stiles. Tyred floor guides run effortlessly in channels neatly concealed beneath closed doors, while effective Weatherseal technology keeps wind, rain and cold air where it belongs. The stabilising centre hinge controls door stile deflection and bowing on tall doors, whilst the exclusive Surelock™ system allows for simple vertical height adjustment with a screwdriver.

Typical Configurations

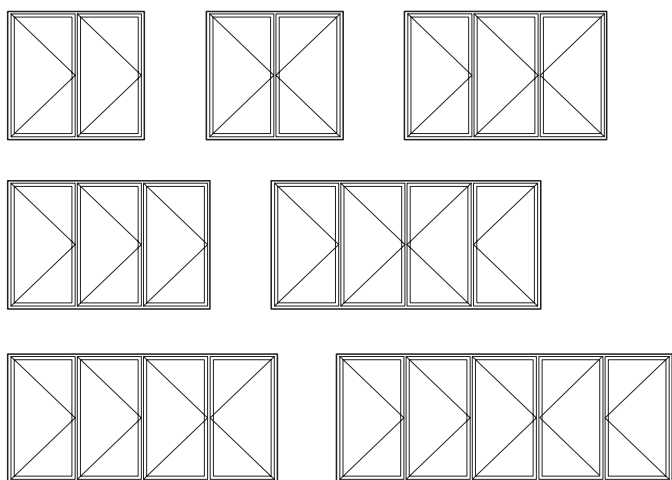

CAD Cross Sections

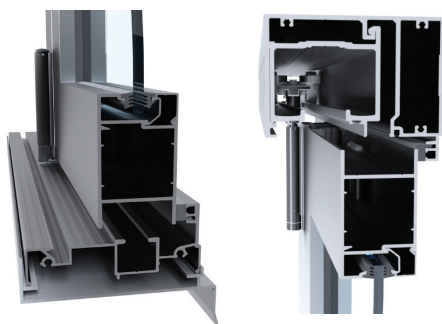

Key Features

- Smooth top-rolling operation
- Weatherseal technology keeps wind, rain and cold air where it belongs
- The stabilising centre hinge controls door stile deflection and bowing on tall doors
- Surelock™ system allows for simple vertical height adjustment when needed
- Uncompromised security with flush bolts and proprietary door furniture
- Accepts from 6mm – 13.5mm single glazed and up to 28mm double glazed units, allowing the designer to achieve the most demanding thermal and acoustic specifications
- Concealed carriers under door panels minimising open tracks for debris to collect

Technical Specifications

Frame Dimensions

Option 1 101.6 x 44.5mm

Maximum Recommended Sizes

Height 3000mm
Width 1000mm E2A/1200mm E3A
Weight 60kg E2A / 115kg E3A

Acoustic Performance

Glass Type Rw (C; Ctr)
6.38mm Laminate 29 dB
10.38mm/12/
6.38mm IGU
34 (25mm Optilam IGU) dB

Thermal Performance

Uw range SG 4.4 – 6.2
SHGC range SG 0.26 – 0.59
Uw range DG 3.2 – 4.0
SHGC range DG 0.15 – 0.51

Glazing Details

Single Glazed 6 – 13.5mm
Double Glazed 18 – 28mm

Compatible Systems

McArthur Evo Centre Pocket Framing
Hunter Evo Flush Glazed Framing
ecoFRAMEplus Centre Pocket Double Glazed Framing



Showrooms

67 McDonald Cres, Bassendean WA 6054
Display 62, Homebase Subiaco,
55 Salvado Rd, Subiaco WA 6008

(08) 9279 7444

sales@customwindows.com.au

customwindows.com.au

