



**CUSTOM
WINDOWS**
ALUMINIUM WINDOWS & DOORS



Hawkesbury®
Top Hung Commercial Sliding Door

Large expansive openings, weather resistant and wheelchair compliant sill.

Top Hung Commercial Sliding Door

The Hawkesbury Top Hung Sliding Door offers architects and designers unrivaled design flexibility with the freedom to achieve large expansive openings whilst also offering a weather resistant and wheelchair compliant sill.

Designed and manufactured in Australia to meet the extremes of the Australian environment, the Alspec Hawkesbury Top Hung Sliding Door is the first choice amongst architects, builders, homeowners and fabricators when performance and quality matter.




Wheelchair Compliant Sill

High Performance Hardware

Specifying Alspec's Hawkesbury Top Hung Sliding Door ensures the client receives a solid, durable high-performance product offering a continuous accessible path of seamless transition between internal and external floor finishes that is capable of large panel sizes up to 3000mm in height and 2500mm in width. Multi-stack configurations are available using high quality E3 hardware by Centor.

Typical Configurations

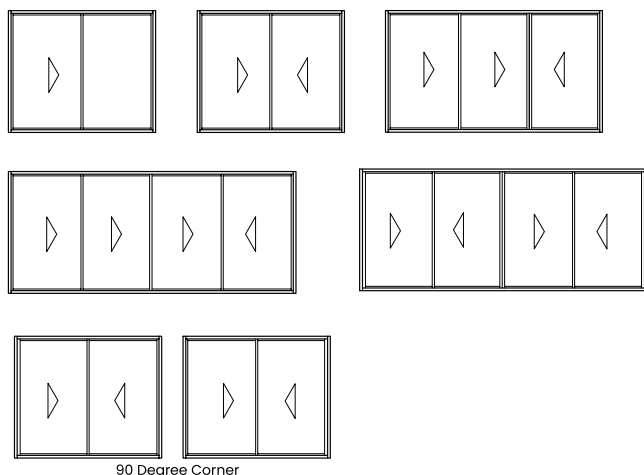

CAD Cross Sections



Key Features

- Powered by exclusive hardware from Centor Architectural the Hawkesbury Door features top-rolling hardware for smooth, trouble-free operation
- 19mm glazing pocket accepts up to 13.5mm single glazed
- Double glazing option accepts up to a 28mm IGU
- Colour coded glazing wedges for ease of identification/glazing
- Panel heights up to 3000mm subject to project requirements and site conditions
- Weatherseal technology keeps wind, rain and cold air where it belongs

Technical Specifications

Frame Dimensions

2 Track 124 x 45 mm
3 Track 186 x 45 mm

Maximum Product Sizes

Height 3000mm
Width 1000mm E2A/1200mm E3A
Weight 60kg E2A / 115kg E3A

Maximum Recommended Sizes

Height 3000 mm
Sash Width 2500 mm
Weight 300 kg per panel

Acoustic Performance

Glass Type Rw (C; Ctr)
6.38mm Laminate Rw 29
6.38mm/12/ 6.5mm Rw32

Thermal Performance

Uw range SG 4.5 – 6.2
SHGC range SG 0.26 – 0.59
Uw range DG 3.2 – 4.0
SHGC range DG 0.25 – 0.52

Glazing Details

Single Glazed 6 – 13.5mm
Double Glazed 18 – 28mm

